




AT5040

User Manual Cardioid Condenser Microphone

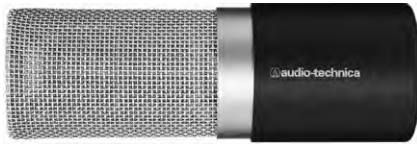

audio-technica

Thank you for purchasing this product. Before using the product, read through the user manual to ensure that you will use the product correctly. Please keep this manual for future reference.

Features

- Audio-Technica's premier studio condenser vocal microphone
- Extremely musical high-fidelity performance, with profound realism and depth, presence and purity of sound
- Four rectangular diaphragms (2 micron) function together as Audio-Technica's largest-ever element, providing combined surface area twice that of a standard one-inch circular diaphragm
- Exceptionally low noise and wide dynamic range ideal for studio vocals
- Discrete components carefully selected for optimized capsule performance
- High-SPL capability and extended frequency response
- Hand assembled and inspected for 100% quality control
- Advanced internal shock mounting decouples the capsule from the microphone body
- Elegant, durable housing of aluminum and brass
- Included advanced-design custom AT8480 shock mount provides superior isolation
- Custom hard-shell carry case with die-cut foam compartments offers protection during storage and transport

Safety precautions

Although this product was designed to be used safely, failing to use it correctly may result in an accident. To ensure safety, observe all warnings and cautions while using the product.

Cautions for the product


- Do not subject the product to strong impact to avoid malfunction.
- Do not disassemble, modify or attempt to repair the product.
- Do not handle the product with wet hands to avoid electric shock or injury.
- Do not store the product under direct sunlight, near heating devices or in a hot, humid or dusty place.

Notes on use

- An Audio-Technica logo is on the front of the microphone. Position this side of the microphone toward the sound source.
- In use, secure the cable to the microphone stand or boom, leaving a slack loop at the microphone. This will ensure the most effective shock isolation and reduce the possibility of accidentally pulling the microphone out of its mount.

Connection procedure

Connect the output terminals of the microphone to a device that has a microphone input (balanced input) compatible with a phantom power supply. The output connector is an XLRM-type with polarity as shown in the figure below.



This product requires 48 V DC phantom power.

How to use the shock mount

1. Before placing the microphone into the included shock mount, make certain that the locking mechanism on the top of the shock mount is in the unlocked position.
2. Open the shock mount front clamps.
3. Insert the microphone directly into the shock mount's front opening with the Audio-Technica logo on the microphone facing outward and the microphone body vertically centered in the shock mount clamps. Firmly press the microphone inward until you hear a click and the microphone feels snug in the shock mount.
4. Secure the microphone by turning the lever on the top of the shock mount to the locked position.

* To remove, first turn the lever on the top of the shock mount to the unlocked position. Next, pull the microphone directly outward. A slight twisting motion can aid in removing the microphone from the shock mount. Be careful that the microphone does not drop down and expose the grille to the shock mount clamps.




Specifications


Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Cardioid
Frequency response	20-20,000 Hz
Open circuit sensitivity	-25 dB (56.2 mV), (0 dB = 1 V/Pa, 1 kHz)
Impedance	50 ohms
Maximum input sound level	142 dB SPL (1 kHz at 1% THD)
Noise	5 dB SPL (A-weighted)
Dynamic range	137 dB (1 kHz at Max SPL)
Signal-to-noise ratio	89 dB (1 kHz at 1 Pa, A-weighted)
Phantom power requirements	48 V DC, 3.8 mA
Weight	582 g (20.5 oz)
Dimensions	165.3 mm (6.51") long, 57.0 mm (2.24") maximum body diameter
Output connector	Integral 3-pin XLRM-type
Audio-Technica case style	R10
Accessories	AT8480 shock mount, stand adapter (3/8"-5/8"), carry case

• 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL
For product improvement, the product is subject to modification without notice.


Polar pattern

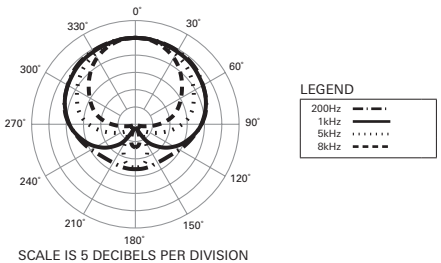

Frequency response

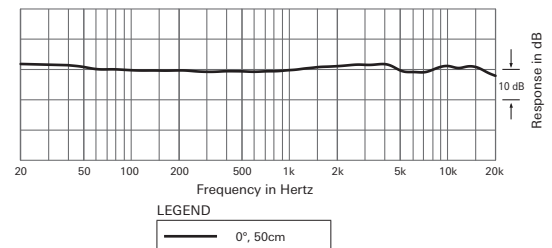

Dimensions

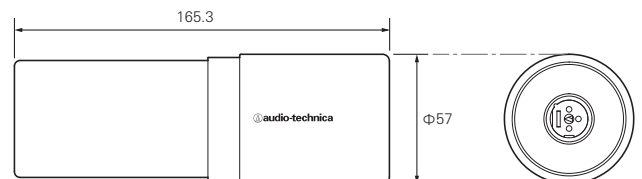

(Unit: mm)

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan

©2017 Audio-Technica Corporation

Global Support Contact: www.at-globalsupport.com

Made in Japan

P52456 142314000-02-01 ver.1 2017.09.15