
ES925ML6/FM3
ES925ML12/FM3
ES925ML15/FM3
ES925ML18/FM3
ES925ML21/FM3
ES925ML24/FM3

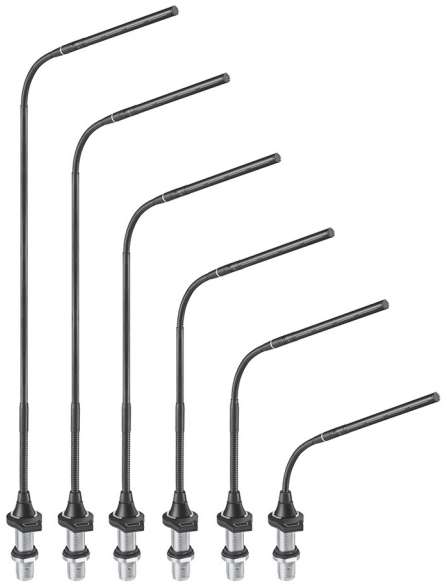

User Manual

MICROLINE CONDENSER
MODULAR GOOSENECK MICROPHONE
WITH 3-PIN FLUSH-MOUNT POWER MODULE

audio-technica

■ Introduction

Thank you for purchasing this product. Before using the product, read through the user manual to ensure that you will use the product correctly. Please keep this manual for future reference.

■ Features

- Modular microphone system comprised of an ES Series capsule, gooseneck assembly, and power module.
- RGB LEDs built into both the flush-mount power module and gooseneck assembly indicate the on/off status of the microphone.
- Capacitive touch switch for microphone control.
- Three-pin output power module allows for inconspicuous tabletop installation.

■ Safety precautions

Although this product was designed to be used safely, failing to use it correctly may result in an accident. To ensure safety, observe all warnings and cautions while using the product.

■ Cautions for the product

- Do not subject the product to strong impact to avoid malfunction.
- Do not disassemble, modify or attempt to repair the product.
- Do not handle the product with wet hands to avoid electric shock or injury.
- Do not store the product under direct sunlight, near heating devices or in a hot, humid or dusty place.

■ Notes on use

- Check the strength of the mounting area. Insufficient strength or poor mounting will cause objects to fall or become damaged.
- The circuitry in the microphone takes about 30 seconds to stabilize after power is supplied. You may hear some audio disturbance during startup.
- Install the microphone on a flat, unobstructed mounting surface.
- Depending on the surface finish of a table, the isolators may leave marks on the table.
- Do not excessively bend the gooseneck assembly, rotate the ends of the capsule, or pull on them. Doing so may cause disconnection or malfunction.
- The product is a modular system comprised of a microphone element, gooseneck assembly and power module. Make sure the parts are firmly attached before use.
- Do not remove the rubber O-ring on the power module connecting part at the lower section of the gooseneck assembly.
- When attaching parts, remove the black cap on the capsule connecting part of the gooseneck assembly. **Do not remove the silicone part at the end of the capsule connecting part.**




■ Assembly


- Insert the gooseneck assembly (c) while rotating it into the flush-mount power module (d).
- Check that the gooseneck assembly does not rotate, and use the included hex wrench (i) to tighten the set screw (h). Tighten until the screw hits the gooseneck assembly, and then tighten again about 90 degrees.
- Connect the capsule (b) to the gooseneck assembly, and attach the windscreen (a).




* If the parts are not sufficiently tightened together, problems may occur such as the LED colors of the gooseneck assembly and power module not matching or sound is not output.

- Refer to the LED table to the right and set the LED color before attaching to the mounting surface.
- If you are installing the flush-mount power module on a table without the isolators, you must make a hole with a diameter of 20.5 mm in the mounting surface.
- If you are installing with the isolators, the hole must have a diameter of 23.5 mm. Inserting the isolators between the mounting surface and power module allows you to separate the flush-mount power module from the mounting surface.
- Attach the upper part isolator (e) to the mounting surface, and attach the flush-mount power module (d). Attach the lower isolator (f) to the reverse side of the mounting surface, and then tighten the nut (g).

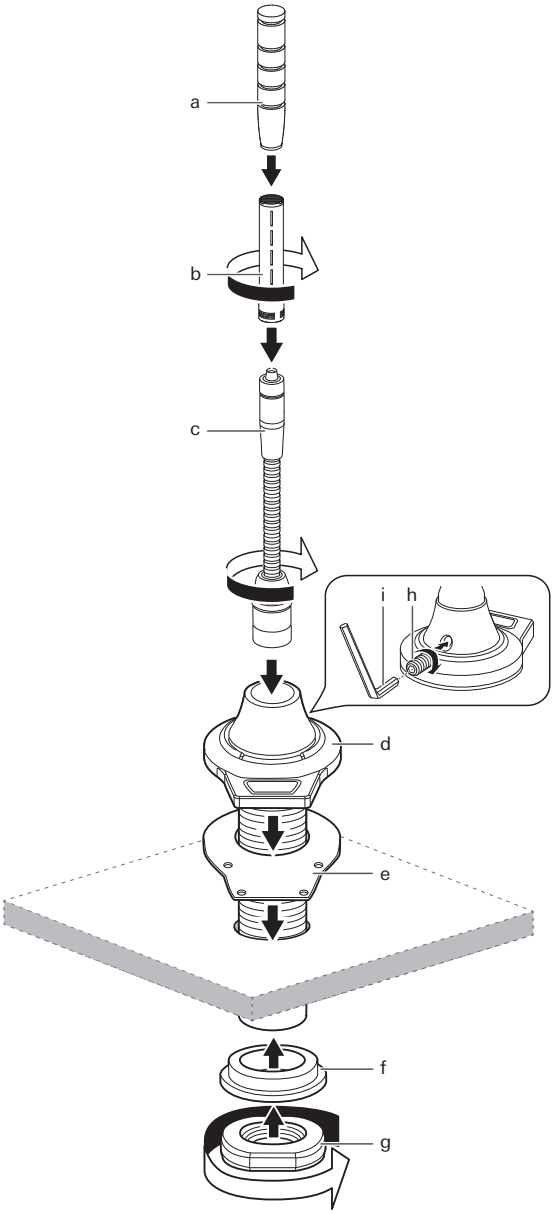

■ Switch setting and functions

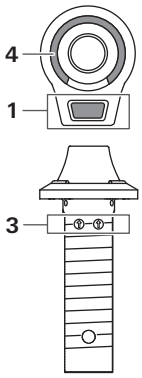


1. Action	2. Audio status	3. LED color	4. LED status
			
			
			

■ LED color

▼	1	2	3
OFF	RED	GREEN	YELLOW
4	5	6	7
BLUE	MAGENTA	CYAN	WHITE

■ Wiring




■ Specifications

ES925MLx/FM3 x = 6/12/15/18/21/24


Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Line + Gradient
Frequency response	30 - 20,000 Hz
Open circuit sensitivity	-35 dB (17.7mV) (0dB=1V/Pa, 1kHz)
Impedance	180 ohms
Maximum input sound level	137 dB SPL (1kHz at 1% THD)
Dynamic range	114 dB (1kHz at Max SPL)
Signal-to-noise ratio	71 dB (1kHz at 1Pa, A-weighted)
Phantom power requirements	22 - 52 V DC, 8 mA
Weight	ES925ML6/FM3: 114.2 g (4.0 oz) ES925ML12/FM3: 138.2 g (4.9 oz) ES925ML15/FM3: 143.2 g (5.1 oz) ES925ML18/FM3: 148.2 g (5.2 oz) ES925ML21/FM3: 153.2 g (5.4 oz) ES925ML24/FM3: 158.2 g (5.6 oz)
Dimensions	ES925ML6/FM3: 326.5 mm (12.9“) x 38 mm (1.5“) x 48 mm (1.9“) ES925ML12/FM3: 434 mm (17.1“) x 38 mm (1.5“) x 48 mm (1.9“) ES925ML15/FM3: 510.2 mm (20.1“) x 38 mm (1.5“) x 48 mm (1.9“) ES925ML18/FM3: 586.4 mm (23.1“) x 38 mm (1.5“) x 48 mm (1.9“) ES925ML21/FM3: 662.6 mm (26.1“) x 38 mm (1.5“) x 48 mm (1.9“) ES925ML24/FM3: 738.8 mm (29.1“) x 38 mm (1.5“) x 48 mm (1.9“) (H×W×D)
Output connector	3-Pin XLRM-type
Optional interchangeable elements	ESE-Ca (120°), ESE-Ha (100°), ESE-Oa (360°)
Included accessories	Isolator 1 pair, Nut, Windscreen AT8138a, Set screw (M2.5×4 mm (0.16“)) 2 pcs., Hex wrench (1.27 mm (0.05“))

■ Polar pattern

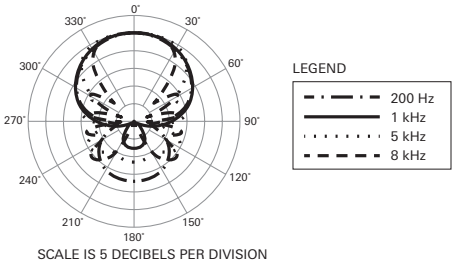



SCALE IS 5 DECIBELS PER DIVISION

■ Frequency response

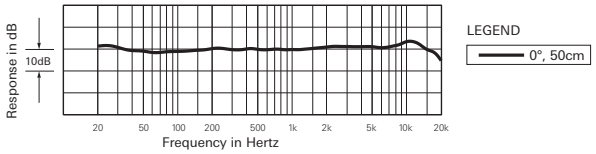

■ Dimensions

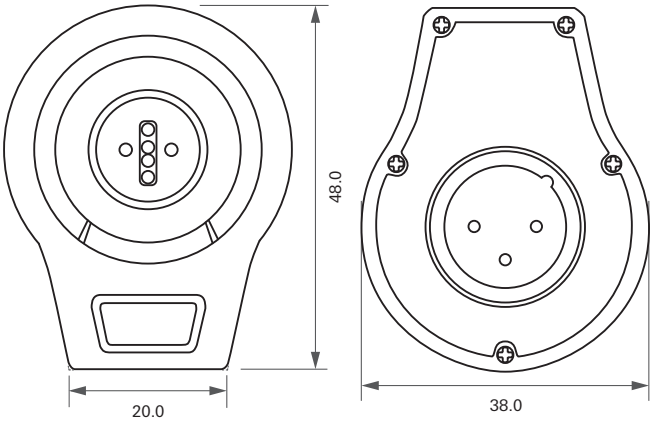

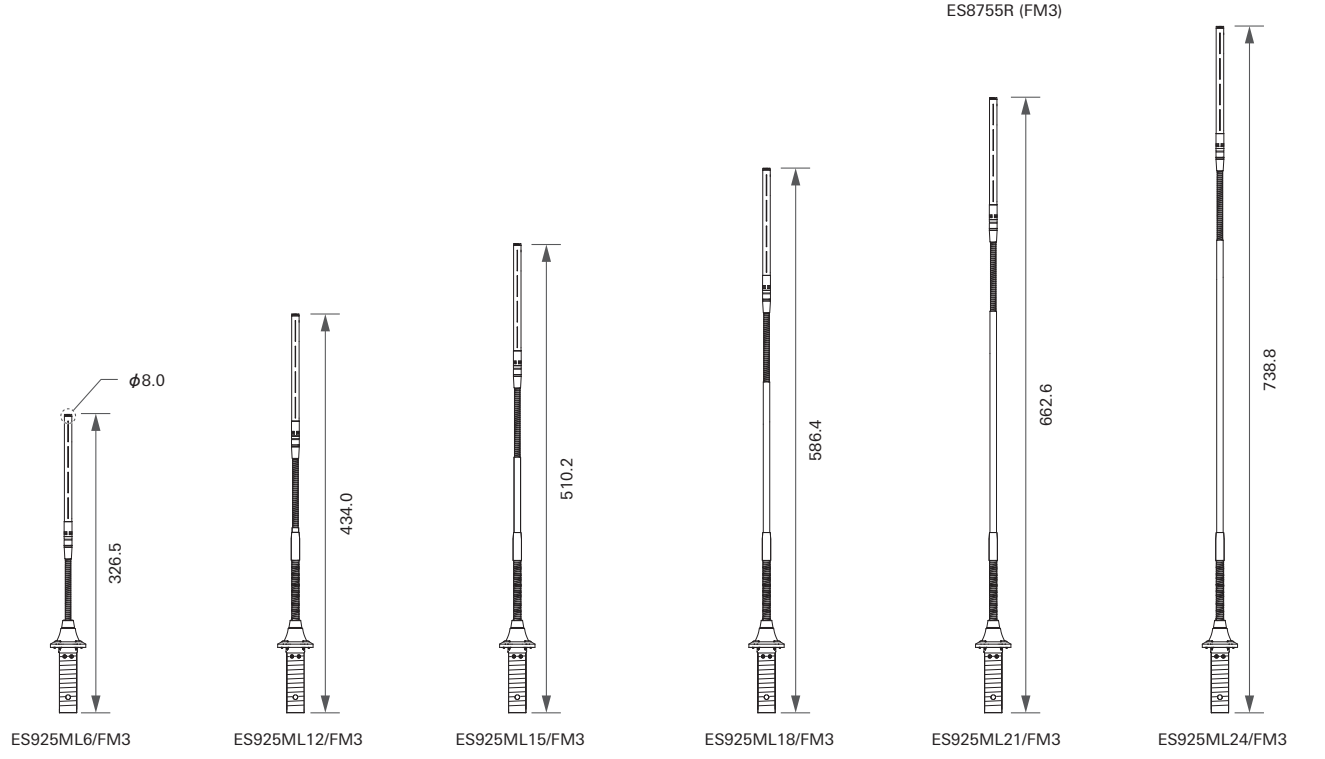

(unit: mm)

Audio-Technica Corporation
2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan
©2024 Audio-Technica Corporation
Global Support Contact: www.at-globalsupport.com
Made in Japan

ver.1 2019.06.01
142419802-02-02 ver.2 2024.10.01