



BP28L Line + Gradient Large Diaphragm Condenser Microphone



Broadcast & Production

Features

- Ideal for film/TV production and broadcasting applications
- Large-diaphragm condenser element and optimized circuitry deliver exceptional low-noise performance
- Overall length of 22.4" (567.9 mm) with an extremely narrow, highly directional pickup pattern
- Transformer-coupled output provides smooth sonic character, and maintains a constant load output impedance for a stable relationship between the mic and mic preamp
- Extremely high sensitivity (-23 dBv), wide dynamic range (135 dB), and high-SPL capability (138 dB)
- Flat frequency response for accurate sound reproduction
- Rugged housing made of lightweight, structural-grade aluminum alloy
- Switchable 80 Hz high-pass filter and -10 dB pad

Description

The BP28L combines a large-diaphragm condenser element with a 28 mm diameter shotgun body for exceptional low-noise performance.

With an extremely tight pickup pattern and a patented acoustic port design that maintains directionality across the entire frequency range, this 22.4" shotgun microphone is specially tailored to meet the needs of broadcast, film, television, outdoors recording and theater applications. Particularly suitable for long-distance miking for film or theater, the BP28L has an exceptionally low noise floor (3 dB) and transformer-coupled outputs that produce a smooth sonic character. The microphone also provides extremely high sensitivity (-23 dBV), wide dynamic range (135 dB), and high-SPL capability (138 dB), and is equipped with a switchable 80 Hz high-pass filter and 10 dB pad.

Operation and Maintenance

The BP28L requires 11V to 52V phantom power for operation.

Output is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" — positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.


An integral 80 Hz high-pass filter provides easy switching from a flat frequency response to a low-end roll-off. The roll-off position reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically coupled vibrations. To engage the high-pass filter, use the end tip of a paperclip or other small pointed instrument to slide the switch toward the "bent" line.

The microphone is also equipped with a switchable 10 dB pad that lowers the

microphone's sensitivity, thus providing higher SPL capability for flexible use with a wide range of users and system configurations. To engage the 10 dB pad, use the end tip of a paperclip or other small pointed instrument to slide the switch toward the -10 position.

Note: The power module and interference tube are detachable. Make certain this connection is hand-tight before use.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.

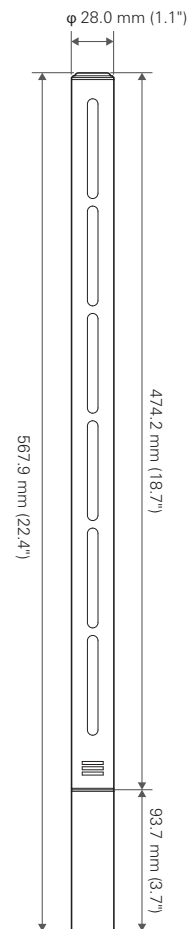

BP28L

To reduce the environmental impact of a multi-language printed document, product information is available online at www.audio-technica.com in a selection of languages.

Afin de réduire l'impact sur l'environnement de l'impression de plusieurs langues, les informations concernant les produits sont disponibles sur le site www.audio-technica.com dans une large sélection de langue.

Para reducir el impacto al medioambiente, y reducir la producción de documentos en varios leguajes, información de nuestros productos están disponibles en nuestra página del Internet: www.audio-technica.com.

Para reduzir o impacto ecológico de um documento impresso de várias linguas, a Audio-Technica providência as informações dos seus produtos em diversas linguas na www.audio-technica.com.

Per evitare l'impatto ambientale che la stampa di questo documento determinerebbe, le informazioni sui prodotti sono disponibili online in diverse lingue sul sito www.audio-technica.com.

Der Umwelt zuliebe finden Sie die Produktinformationen in deutscher Sprache und weiteren Sprachen auf unserer Homepage: www.audio-technica.com.

Om de gevolgen van een gedrukte meertalige handleiding op het milieu te verkleinen, is productinformatie in verschillende talen "on-line" beschikbaar op: www.audio-technica.com.

本公司基於減少對環境的影響，將不作多語言文件的印刷，有關產品訊息可在 www.audio-technica.com 的官方網頁上選擇所屬語言及瀏覽。

本公司基于减少对环境的影响，将不作多语言文档的印刷，有关产品信息可在 www.audio-technica.com 的官方网页上选择所属语言和浏览。

자원절약, 환경보호를 위해 국문 사용 설명서는 인쇄하지 않았습니다.
제품정보는 www.audio-technica.com 에서 원하는 언어 선택 후에 다운로드 받으실 수 있습니다.

Specifications

Element	Fixed-charge back plate, permanently polarized condenser
Polar pattern	Line + gradient
Frequency response	20-20,000 Hz
Low frequency roll-off	80 Hz, 18 dB/octave
Pad	-10 dB
Open circuit sensitivity	-23 dB(70.8 mV) (0 dB=1 V/Pa, 1 kHz)
Impedance	250 ohms
Maximum input sound level	138 dB SPL (1 kHz at 1% THD), 148 dB SPL (When pad is on.)
Noise ¹	3 dB SPL (A-weighted)
Dynamic range (typical)	135 dB (1 kHz at Max SPL)
Signal-to-noise ratio ¹	91 dB (1 kHz at 1 Pa, A-weighted)
Phantom power requirements	11-52 V DC, 3.4 mA
Switches	Low cut: on/off, Pad: on/off
Weight	313 g (11 oz)
Dimensions	567.9 mm (22.4") long, 28.0 mm (1.1") maximum body diameter
Output connector	Integral 3-pin XLR-M type
Audio-Technica case style	SG7
Accessories furnished	Windscreen (AT8169), holder (AT8470), stand adapter (3/8"-5/8"), carry case

In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.


1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

¹ Typical, A-weighted, using Audio Precision System One.


Specifications are subject to change without notice.



frequency response: 20–20,000 Hz

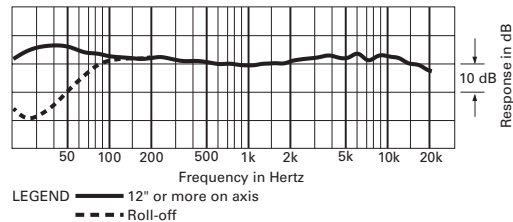

polar pattern

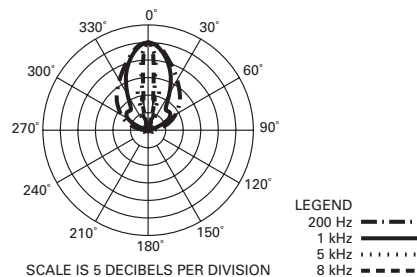

Audio-Technica Corporation
audio-technica.com
©2022 Audio-Technica

0000-6429-00