



DJ Mixers

AM200 Four-channel Audio Mixer



The AM200 four-channel stereo mixer is capable of mixing combinations of two magnetic phono turntables, four stereo line-level devices and two microphones.

A digital sound effects generator produces six popular sounds: Snare, Bomb, Video Gun, Laser, Phone and UFO. The speed and volume of the effects are continuously adjustable.

AM200 Specifications

Input Sensitivity/Overload, Input Impedance:

Mic	1 mV/45 mV, 1k ohms
Magnetic Phono at 1 kHz	3 mV/120 mV, 50k ohms
Line(CD/Tape/Aux)	150 mV/8V, 100k ohms

Recommended Mic

Matching Impedance Low impedance, up to 1k ohms

Output:

Normal	1.5V
Maximum (at clipping)	8V

Frequency Response:

Mic	20-20k Hz ± 0.5 dB
Magnetic Phono Inputs	RIAA (± 2 dB)
Line-level Inputs	20-20k Hz ± 0.5 dB

Total Harmonic Distortion:

Mic	0.50%
Magnetic Phono	0.20%
Line(CD/Tape/Aux)	0.05%


Stereo Separation Better than 45 dB

Signal-to-noise Ratio (re: Max. Output):

Mic	60 dB
Phono	70 dB

Line(CD/Tape/Aux)	75 dB
Stereophone Output/Impedance	150 mV/8 ohms
Power	110-120/220-240V, 50/60 Hz, 8W
Dimensions	13.5"W x 10.6"D x 2.8"H
Net Weight	6.16 lbs.

[Conditions and Warranty](#)

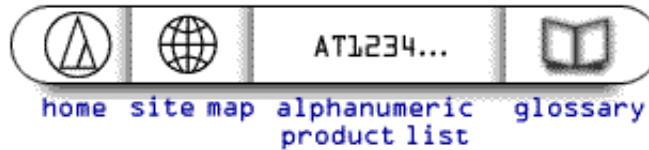

[© 1999 Audio-Technica U.S., Inc.](#)