



Pro Series

PRO 2ax Cardioid Dynamic Microphone



- Affordable design for voice and instrument pickup
- Universal impedance for Lo-Z or Hi-Z inputs
- Oversize ball-type multistage windscreen
- On/off switch and professional 3-pin output connector
- Includes 16.5' (5 m) cable (XLR-type to 1/4" phone plug)

PRO 2ax Specifications

Element

Dynamic

Polar Pattern

Cardioid

Frequency Response

90 - 13,000 Hz

Open Circuit Sensitivity

-40 dB (10.0 mV) re 1V at 1 Pa

Accessories Furnished: Stand clamp

Impedance

8000 ohms

Switch


On/off

Weight


5.1 oz (145 g)

Output Connector


XLRM-type

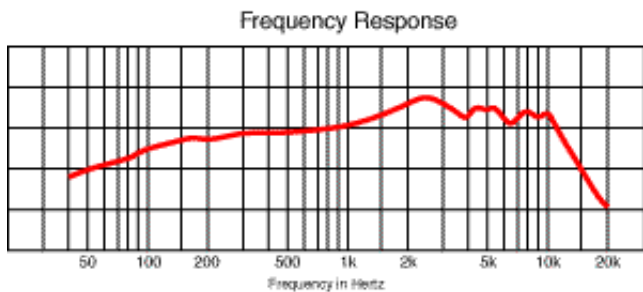

LEGEND — 12" or more on axis



[Conditions and Warranty](#)



[home](#) [site map](#) [alphanumeric product list](#) [glossary](#)

© 2000 Audio-Technica U.S., Inc.