

ES9450/FM3

Omnidirectional Condenser Boundary Microphone

User Manual

Safety precautions

Although this product was designed to be used safely, failing to use it correctly may result in an accident. To ensure safety, observe all warnings and cautions while using the product.

Cautions for the product

- Do not subject the product to strong impact to avoid malfunction.
- Do not disassemble, modify or attempt to repair the product.
- Do not handle the product with wet hands to avoid electric shock or injury.
- Do not store the product under direct sunlight, near heating devices or in a hot, humid or dusty place.

Notes on use

- Do not swing or pull with the cable connected to the microphone to prevent the microphone from becoming disconnected or damaged.
- Do not wind the cable around the rack or allow the cable to become pinched.
- The microphone should be placed on a flat, unobstructed mounting surface.
- Placing any object on a surface (such as a conference table) before its finish is fully cured may result in damage to the finish.

Using the product

Included accessories





2




3



- 1 Rubber isolator (1)
- 2 Rubber isolator (2)
- 3 Nut

How to mount the product

Table/ceiling hole size (when using isolators)




(Unit: mm)

Table/ceiling hole size (when not using isolators)




(Unit: mm)


Example: Mounting on a table



- 1 Rubber isolator (1)
- 2 Rubber isolator (2)
- 3 Nut
- 4 Table

Switch setting and functions



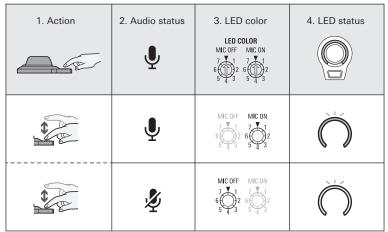


LED color

▼	1	2	3
OFF	RED	GREEN	YELLOW

4	5	6	7
BLUE	MAGENTA	CYAN	WHITE


Connection procedure

The output connector is an XLR-M type with polarity as shown in the figure below.



- 1 PIN1 (ground)
- 2 PIN2 (hot)
- 3 PIN3 (cold)

Dimensions

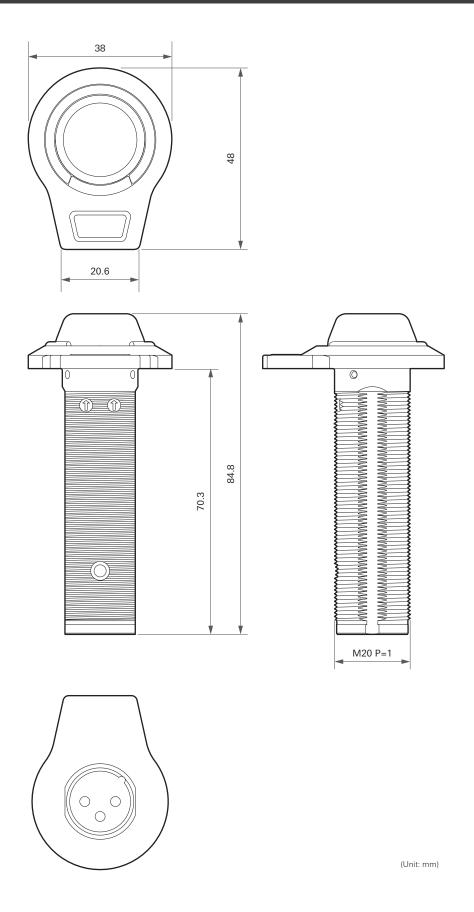


Specifications

Element	Fixed-charge back plate, permanently polarized condenser	
Polar pattern	Omnidirectional	
Frequency response	60 to 15,000 Hz	
Open circuit sensitivity	-33 dB (0 dB = 1 V/Pa, 1 kHz)	
Impedance	60 ohms	
Maximum input sound level	t sound level 130 dB SPL (1 kHz at 1% THD)	
Dynamic range	109 dB (1 kHz at Max SPL)	
Signal-to-noise ratio	se ratio 73 dB (1 kHz at 1 Pa, A-weighted)	
Phantom power requirements	11-52 V DC, 7.5 mA	
Weight	59 g (2.1 oz)	
Dimensions	38 mm (1.50") × 48 mm (1.89") × 84.8 mm (3.34") (W × D × H)	
Output connector	ector Integral 3-pin XLR-M type	
Included accessories	Rubber isolator (2 types), Nut	

- 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL
- For product improvement, the product is subject to modification without notice.

Polar pattern/Frequency response

Polar pattern




LEGEND



SCALE IS 5 DECIBELS PER DIVISION

Frequency response

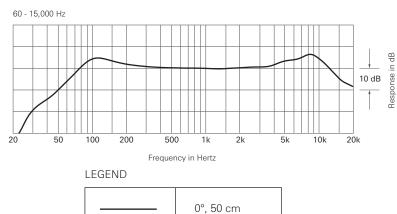

株式会社オーディオテクニカ 〒194-8666 東京都町田市西成瀬2-46-1 www.audio-technica.co.jp

Audio-Technica Corporation

2-46-1 Nishi-naruse, Machida, Tokyo 194-8666, Japan www.audio-technica.com ©2021 Audio-Technica Corporation Global Support Contact: www.at-globalsupport.com